



**Low headroom
system for
residential doors**

SRR70
system



SRR70 system

Doco International introduces a new Residential System; SRR70. You save time and money because of the innovative easy mount principle of the power unit. The track sets are available in bolted and riveted versions. This System is suitable for all 40mm panels. Available as pre-assembled sets or separate components.

One person fitting using only one 13mm tool.



**“Easy - mount”
system**

Technical information

- Torsion spring system (rear);
- Seven standard heights available; 2000, 2125, 2250, 2375, 2500, 2750, 3000mm;
- Maximum door size: 5000 x 3000mm (W x H);
- Maximum door weight: 165 kg;
- Headroom, manual, at standard height 70mm;
- Headroom, operator, at standard height 100mm;
- Side room minimum 75mm with 14024 bolt;
- CE designed conform 13241-1;
- ITT approved by SP;



Additional SRR70 components:



**Spring break device
25650-L/R**

- Spring break device
- Certified for 60 Nm/spring
- SP certificate number P902383
- Universal design for 50 and 67mm springs
- Fixed ratchet wheel on device
- Easy fitting (shape in shape)
- Easy assembly of power unit, easy mount system
- For use with 24619-L/R



**Rear Bracket
24619-L/R**

- Mounting possibility for slide able C-track
- Easy mounting support using 25650-L/R



**Support bracket
13024**

- For doors wider then 3000mm



**60mm Pulley
25270**

- For 3mm cable
- With holes for 44012 mounting

**Top roller carrier
25003-L/R**

- With 46mm roller



**80mm Pulley
25271**

- For 4mm cable
- With holes for 44012 mounting



Slideable C-track

Art. nr.	Length (mm)
24810	1350
24811	3000
24812	1350
24813	3000

Notes:
With holes
With holes
Without holes
Without holes

With holes
With holes
With holes
Without holes
Without holes
Without holes






**Connection bracket
24801**

- To use with 24803 and 24805



**Suspension profile
24803 + 24805**

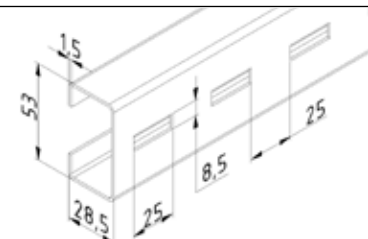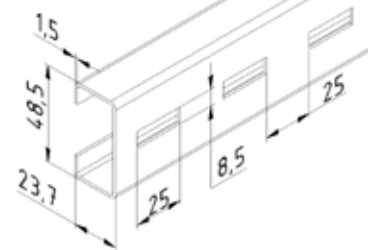


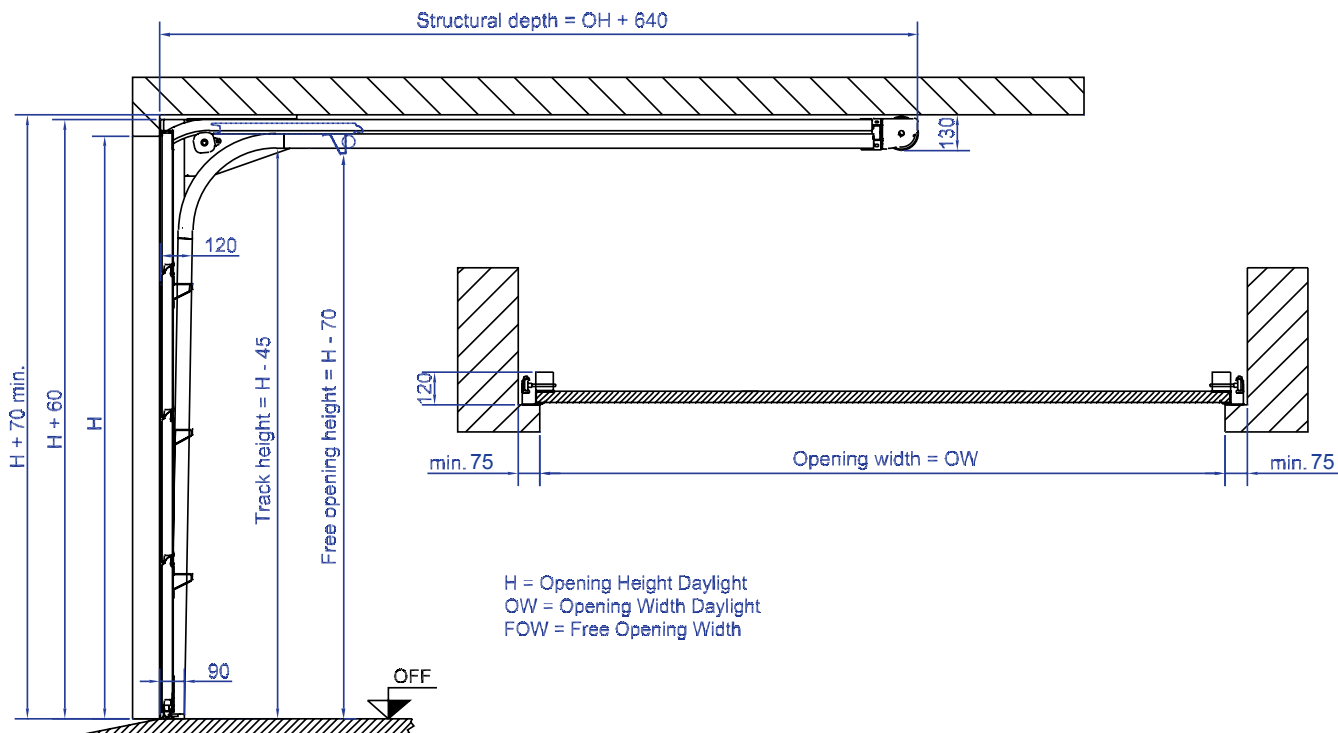

Pre-assembled trackset overview for SRR 70 system



Horizontal trackset SRR 70 (Pair).



Curve section SRR 70 (Pair).



	Vertical trackset SRR70 (pair)		Horizontal trackset SRR70 (Pair)		Curve section SRR70 (pair)
	bolted version	rivet version	bolted version	rivet version	rivet version
Standard door opening height	Article	Article	Article	Article	Article
2000	44000-2000	44010-2000	44001-2000	44011-2000	44012
2125	44000-2125	44010-2125	44001-2125	44011-2125	44012
2250	44000-2250	44010-2250	44001-2250	44011-2250	44012
2375	44000-2375	44010-2375	44001-2375	44011-2375	44012
2500	44000-2500	44010-2500	44001-2500	44011-2500	44012
2750	44000-2750	44010-2750	44001-2750	44011-2750	44012
3000	44000-3000	44010-3000	44001-3000	44011-3000	44012



Vertical trackset SRR 70 (Pair).
Including weather seal.

Doco International B.V.
 Nusterweg 96
 6136 KV Sittard
 P.O. Box 427
 6130 AK Sittard
 The Netherlands
 Tel: +31 (0) 464200666
 Fax: +31 (0) 464526894

Doco International Limited
 Unit 1 Northolt Trading Estate
 Belvue Road
 Northolt Middlesex
 UB5 5QS
 United Kingdom
 Tel: +44 (0) 20 8839 8587
 Fax: +44 (0) 20 8842 3661

Doco International
 Southern Europe S.L.
 P.I. Can Met Sidro
 Avenida Generalitat, 55
 08530 La Garriga / Barcelona
 España / Spain
 Tel: +34 9 3 861 28 25
 Fax: +34 9 3 871 65 92

Doco International s.r.o.
 Prostějov - Kralice na Hané
 Háj 352
 798 12 Kralice na Hané
 Czech Republic
 Tel: +420 582 360 100
 Fax: +420 582 360 300